

[PCB Design Magazine, Oct.
2014, p. 12-23](#)

How to validate interconnect analysis software for 28 Gbps data links

Yuriy Shlepnev, Simberian Inc.

In collaboration with Wild River Technology LLC

DesignCon IBIS Summit, Santa Clara, January 30, 2015

Outline


- Introduction
- Validation process overview
- Example of analysis to measurement validation
 - Measured S-parameters pre-qualification
 - Geometry adjustments
 - Material models identification
 - Comparing analysis to measurements
- Conclusion

Introduction

- Design of PCB and packaging interconnects for data links running at bitrates 28-32 Gbps and beyond is a challenging problem:
 - It requires electromagnetic analysis over extremely broad frequency bandwidth from DC to 40-50 GHz
 - No frequency-continuous dielectric models available from manufacturers
 - No conductor roughness models available from manufacturers
 - Boards are not manufactured as designed – large variations and manipulations by manufacturers
 - Making accurate measurements over this bandwidth is very difficult
- Is it possible to design interconnects and have acceptable analysis to measurement correlation from DC up to 40-50 GHz systematically?

Analysis correlates with measurements if...

- 1) Quality of S-parameter models is ensured
- 2) Simulation of all elements in isolation is possible or coupling is properly accounted
- 3) Broadband material models are identified or confirmed
- 4) Models are validated with measurements

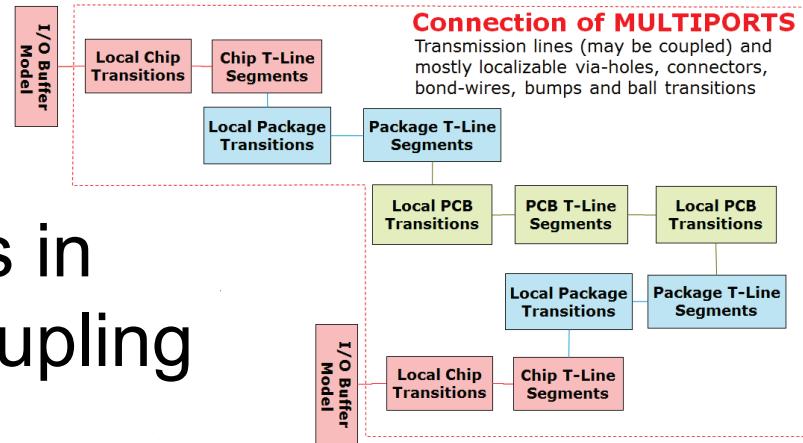


4 elements of design success – see App Notes #2013_03 and #2013_05 at <http://www.simberian.com/AppNotes.php>

Analysis to measurement validation process for 28-32 Gbps interconnects

- **Design and manufacture** a board with a set of typical or useful interconnect links
- **Measure S-parameters** up to 40-50 GHz
- Load board design into EDA tool, and **compute S-parameters** of the links
- **Compare S-parameters** magnitudes and phases
- Optionally compare TDR/TDT and eye diagrams
- As simple as that... ☺

Validation platforms simplify the process!

- CMP-28/32 Channel Modeling Platform was developed by Wild River Technology to promote systematic approach to interconnect analysis to measurement validation up to 40/50 GHz or up to 28/32 Gbps
 - Contains 27 micro-strip and strip-line interconnect structures equipped with 2.92 mm (CMP-28) and 2.4 mm (CMP-32) connectors and can be used to validate signal integrity simulations, models, and measurement technique
 - Simbeor electromagnetic signal integrity software is used here to illustrate all elements of the analysis to measurement validation

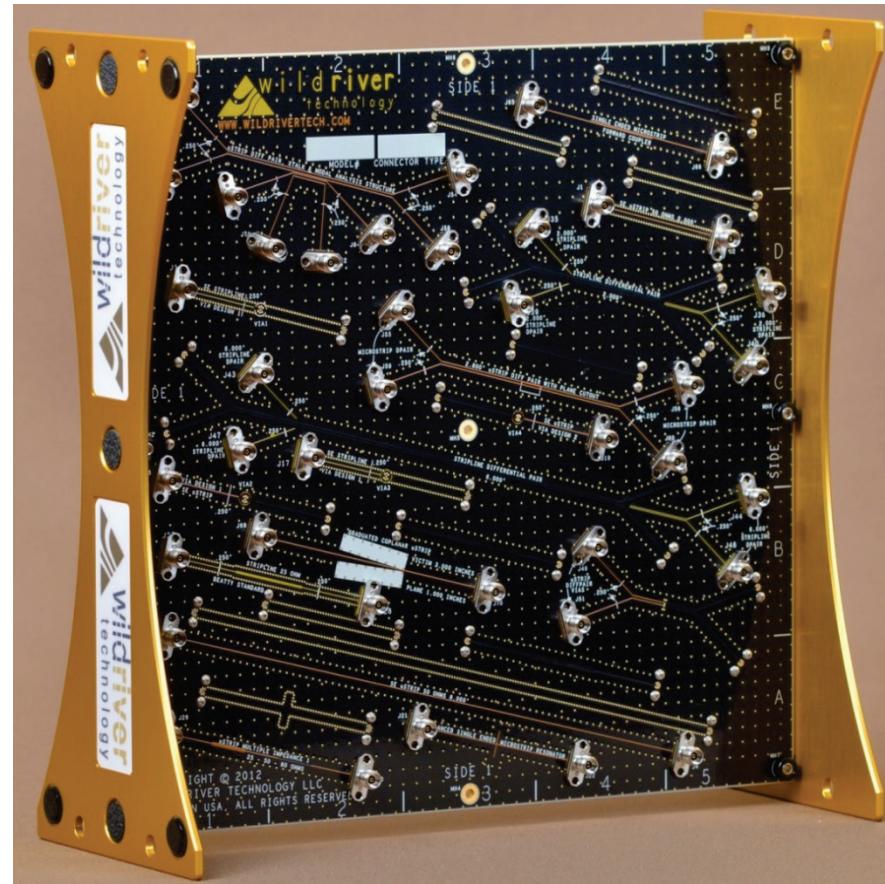

Complete description of CMP-28/32 platforms with all results is available at
http://www.simberian.com/Presentations/CMP-28_Simbeor_Kit_Guide.pdf

Example of analysis to measurement validation with CMP-28 platform

1. Use VNA to measure S-parameters and validate quality of the measurements
2. Get board geometry adjustments (stackup and trace widths) from manufacturer (if any) and use consistently in the material identification and the analysis (use cross-sectioning if no data provided)
3. Identify broad-band dielectric and conductor roughness models with Generalized Modal S-parameters (GMS-parameters)
4. Simulate all structures with the identified or validated material models and confirmed adjustments consistently and compare with the measurements (no further manipulations with data)

*4 steps with live demo are covered in webinar #4 at
<http://www.simberian.com/Webinars.php>*

Step 1: Ensure S-parameters quality

- Accuracy of discrete S-parameters approximation with frequency-continuous macro-model, passive from DC to infinity

$$RMSE = \max_{i,j} \left[\sqrt{\frac{1}{N} \sum_{n=1}^N |S_{ij}(n) - S_{ij}(\omega_n)|^2} \right]$$

original tabulated data $S_{ij}(i\omega) = \left[d_{ij} + \sum_{n=1}^{N_{ij}} \left(\frac{r_{ij,n}}{i\omega - p_{ij,n}} + \frac{r_{ij,n}^*}{i\omega - p_{ij,n}^*} \right) \right] e^{-s \cdot T_{ij}}$

- Can be used to estimate quality of the original data

$$Q = 100 \cdot \max(1 - RMSE, 0) \%$$

Model Icon/Quality	Quality Metric	RMSE
✓ - good	[99, 100]	[0, 0.01]
✓ - acceptable	[90, 99)	(0.01, 0.1]
⚠ - inconclusive	[50, 90)	(0.1, 0.5]
✗ - bad	[0, 50)	> 0.5
?] - uncertain	[0,100], not passive or not reciprocal	

Rational model can be used for FD and TD analysis instead of the original data

Introduced at IBIS forum in 2010

Quality estimation theory is covered in webinar #1 at
<http://www.simberian.com/Webinars.php>

Example of S-parameter quality estimation with rational compact model (RCM)

S-parameters are measured for CMP-28 by expert; Models include connectors and adapters;
RCM are built with options: “Extrapolate to infinity” and “Extract Delay” and “Auto-adjust” are OFF)

Touchstone Analyzer				
File name	Quality	Passivity	Reciprocity	Causality
C:\Repository\cmp28_m: cmp28_gnd_voids_p1J74_p2J75.s2p	99.5	100	99.4	-
C:\Repository\cmp28_m: cmp28_graduated_coplanar_p1J70_p2J69.s2p	99.7	100	99.5	-
C:\Repository\cmp28_m: cmp28_mstrp_2in_p1J1_p2J2.s2p	99.5	100	99.7	-
C:\Repository\cmp28_m: cmp28_mstrp_8inch_p1J4_p2J3.s2p	99.7	100	99.8	-
C:\Repository\cmp28_m: cmp28_mstrp_Beatty_25ohm_p1J25_p2J26.s2p	99.6	100	99.4	-
C:\Repository\cmp28_m: cmp28_mstrp_multiZ_p1J31_p2J32.s2p	99.6	100	99.3	-
C:\Repository\cmp28_m: cmp28_mstrp_p1J30_p2J29.s2p	99.6	100	99.8	-
C:\Repository\cmp28_m: cmp28_mstrp_resonator_p1J22_p2J22.s2p	99.7	100	99.7	-
C:\Repository\cmp28_m: cmp28_mstrp_whiskers_p1J68_p2J67.s2p	99.5	100	99.8	-
C:\Repository\cmp28_stripline: cmp28_strpl_2in_50ohm_p1J6_p2J5.s2p	99.6	100	99.1	-
C:\Repository\cmp28_stripline: cmp28_strpl_2in_Capacitive_p1J10_p2J09.s2p	99.5	100	99.5	-
C:\Repository\cmp28_m: cmp28_strpl_2in_Inductive_p1J12_p2J11.s2p	99.5	100	99.4	-
C:\Repository\cmp28_m: cmp28_strpl_8inch_p1J7_p2J8.s2p	99.6	100	99.7	-
C:\Repository\cmp28_m: cmp28_strpl_Beatty_25ohm_p1J28_p2J27.s2p	99.7	100	99.4	-
C:\Repository\cmp28_m: cmp28_strpl_resonator_p1J23_p2J24.s2p	99.6	100	99.4	-
C:\Repository\cmp28_m: cmp28_via_pathology_p1J65_p2J66.s2p	99.6	100	99.8	-
C:\Repository\cmp28_m: cmp28_mstrp_via_inductive_p1J15_p2J10.s2p	99.5	100	99.6	-
C:\Repository\cmp28_m: cmp28_strpl_via_backdrilled_p1J14_p2J13.s2p	97.7	100	99.4	-
C:\Repository\cmp28_m: cmp28_strpl_via_capacitive_p1J18_p2J17.s2p	93.4	100	99.7	-



ALL PASSED!

See how to do it in demo-videos #2011_01 and
2011_02 at <http://www.simberian.com/ScreenCasts.php>


Step 2: Board geometry adjustments

- Stackup is adjusted from data provided by manufacturer
- Width adjustments before analysis to match the impedance observed on TDR:
 - Micro-strip single-ended line widths are adjusted from 14.5 to 13.5 mil
 - Strip line single-ended widths are adjusted from 11.0 to 10.5 mil
 - All other widths and dimensions are exactly as in the board design (may need consistent adjustments as follows from the validation)
- Cross-sectioning may be needed to investigate all adjustments

Step 3: Identify material models with Generalized Modal S-parameters (GMS-parameters)

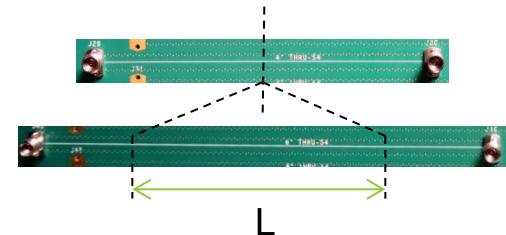
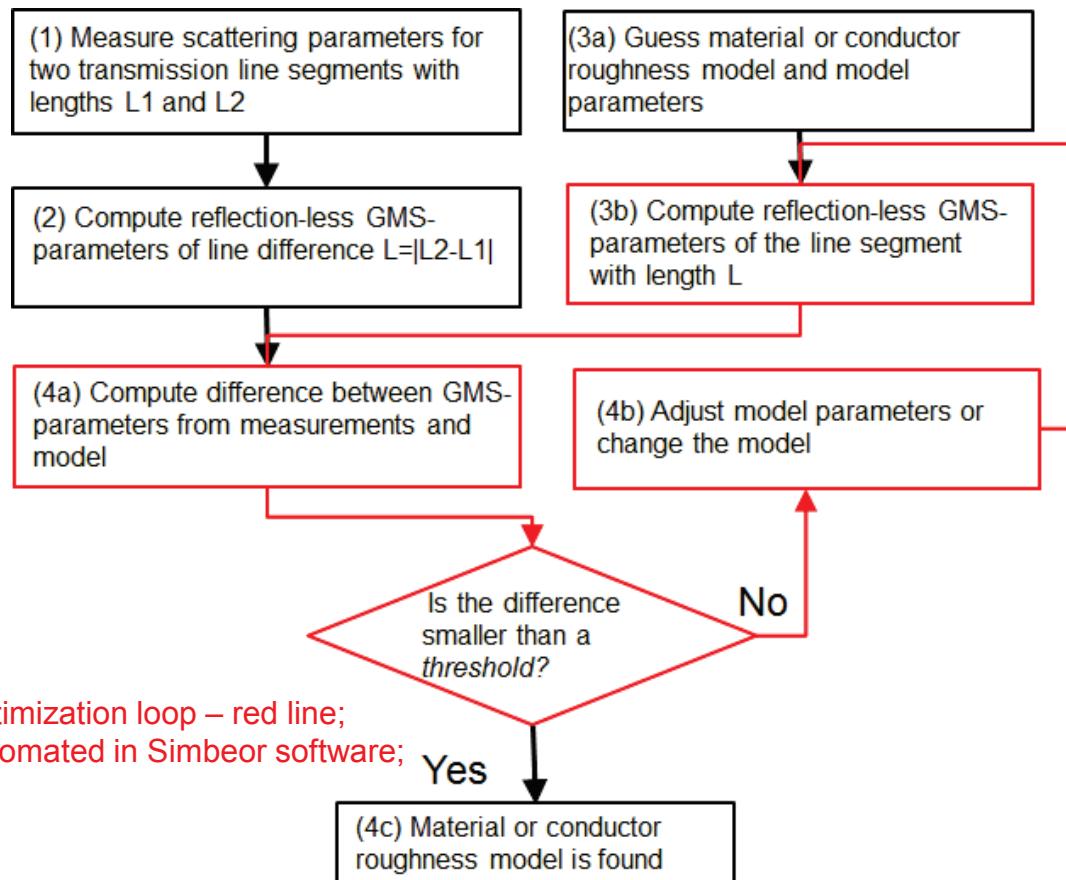


GMS-parameters have zero reflection and mode transformation;
Applicable to dielectric and conductor roughness models;

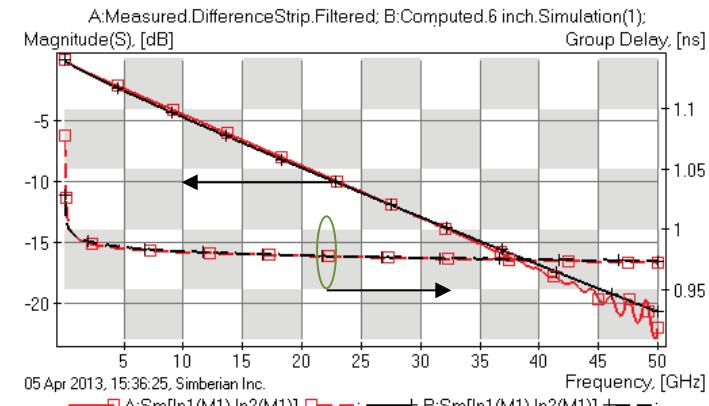

See App Notes #2014_02 and 2014_03 for details on identification with GMS-parameters at
<http://www.simberian.com/AppNotes.php> and webinar #2 at <http://www.simberian.com/Webinars.php>

Step 3: Dielectric and conductor roughness model identification with strip line

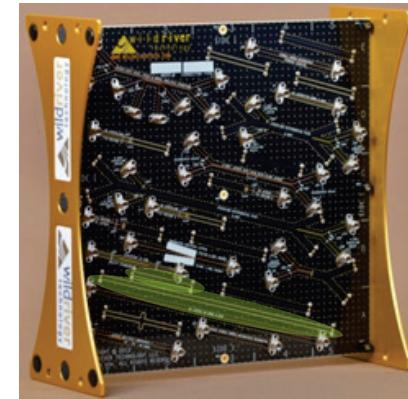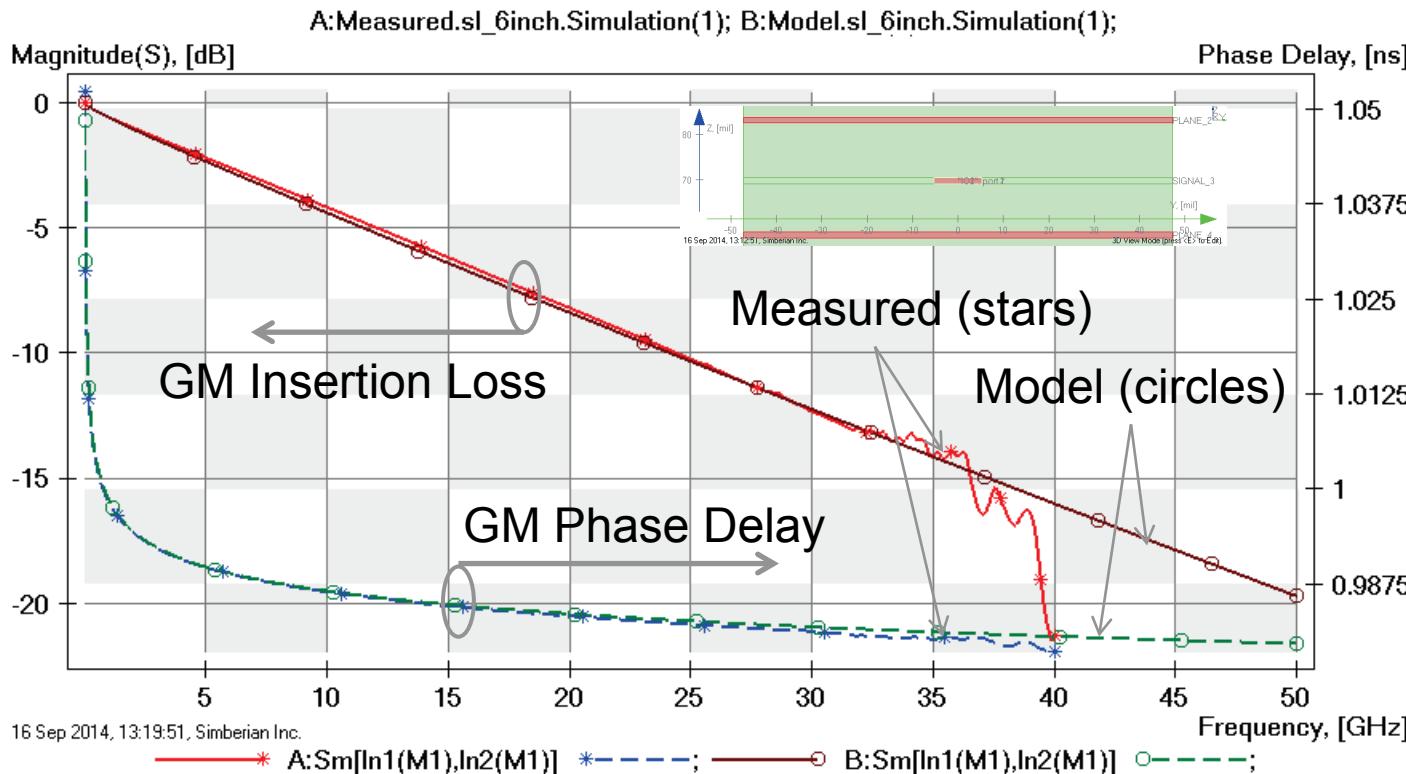

GM - Generalized
Modal (reflection-less);

About 35 GHz useful
bandwidth from the
measured data due to
mechanical differences;



Models are usable
up to 50 GHz!

GMS parameters computed from S-parameters measured for 2 and 8 inch strip line segments (red and blue lines) and modeled for 6 inch strip line segment (brown and green lines):

FR408HR model: Wideband Debye, $Dk=3.815$ (3.66), $LT=0.0117$ @ 1 GHz;

Conductor roughness model: Modified Hammerstad, $SR=0.4$ um, $RF=2$;

Step 3: Dielectric and conductor roughness model identification with micro-strip line

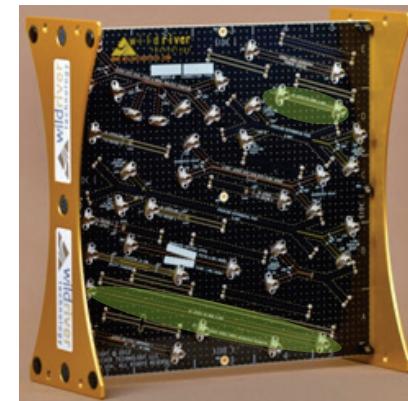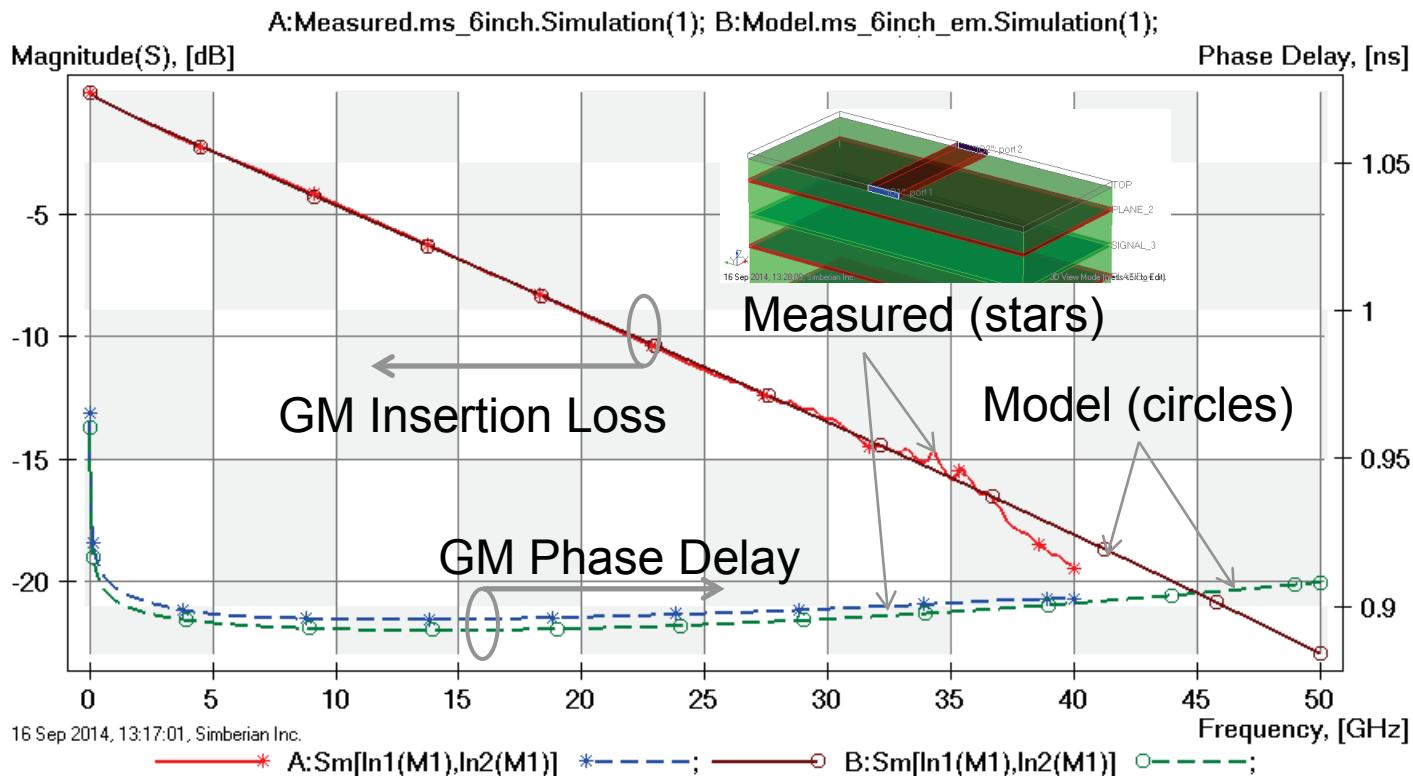

GM - Generalized
Modal (reflection-less);

Models are usable
up to 50 GHz!

GMS parameters computed from S-parameters measured for 2 and 8 inch micro-strip line segments (red and blue lines) and modeled for 6 inch micro-strip line segment (brown and green lines):

FR408HR model: Wideband Debye, $Dk=3.815$ (3.66), $LT=0.0117$ @ 1 GHz (same as for strip);

Taiyo solder mask model: Wideband Debye, $Dk=3.85$ (3.9), $LT=0.02$ @ 1 GHz;

Conductor roughness model: Modified Hammerstad, $SR=0.4$ um, $RF=3.5$;

Step 4: Simulate all 27 structures and compare with the measurements

- Compute and compare S-parameters for all structures (complete adapter-to-adapter links or use de-embedding)
 - Compare simulated and measured magnitudes and phase/group delays in terminal and mixed-mode space up to 50 GHz
- Compute TDR from simulated and measured S-parameters and compare for all structures
 - Use rational compact models and Gaussian step with 20 ps 10-90% rise time
- Compute eye diagrams for 28 Gbps PRBS signals from simulated and measured S-parameters and compare for selected structures

*Basics of the de-compositional analysis covered in webinar #3 at
<http://www.simberian.com/Webinars.php>*

1) 2-inch microstrip line segment: De-compositional analysis

Board Analyzer:
2 discontinuity selectors
with coaxial ports

Auto-extraction

Connector + adapter
model (added)

Launch model

Simbeor 3DML (with HF dispersion)

Trace width is adjusted in BA

Editor Mode (press <E> for Network View)

Connector + adapter
model (added)

Magnetic wall right above at
the top layer to eliminate
excessive capacitance

Simbeor 3DML

16 Sep 2014, 15:42:12, Simberian Inc.

16 Sep 2014, 15:43:16, Simberian Inc.


16 Sep 2014, 15:44:29, Simberian Inc.

3D View Mode (press <E> to Edit).


© 2015 Simberian Inc.

15


1) 2-inch microstrip line segment: Magnitude of S-parameters

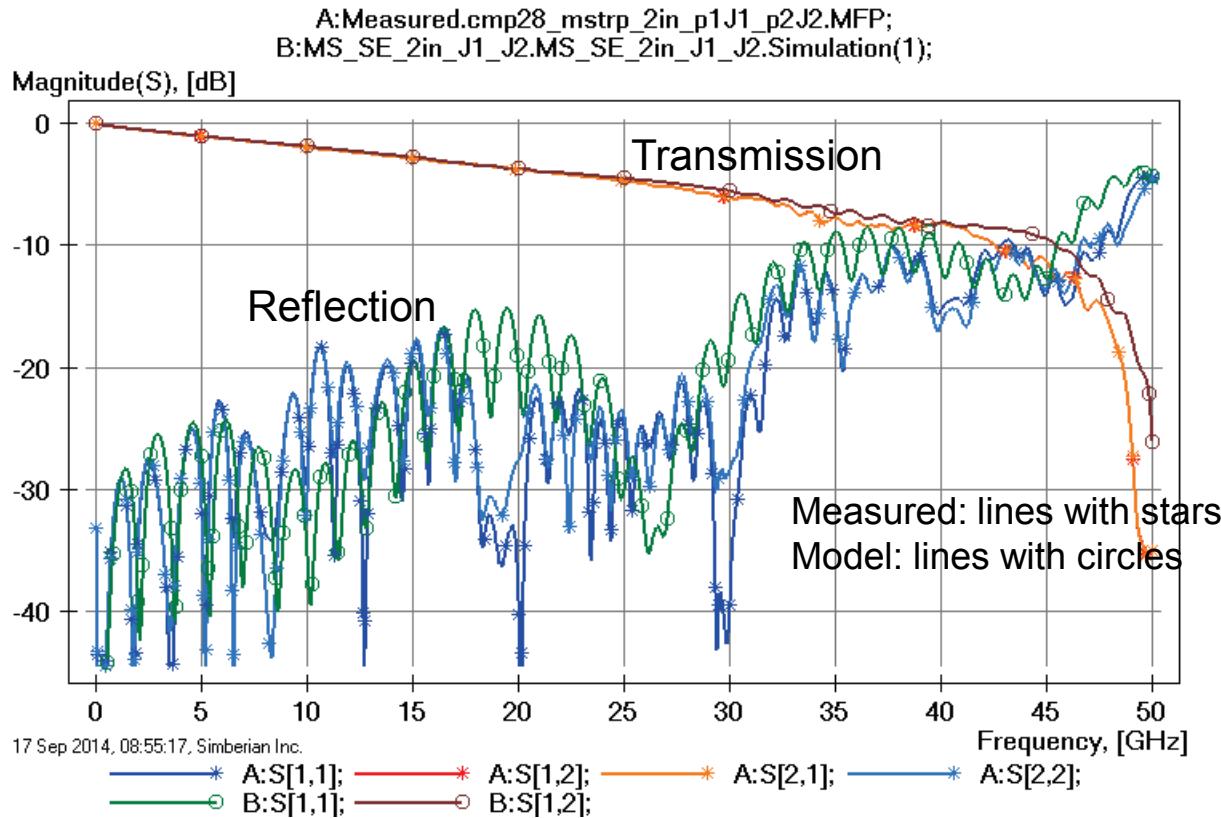


MS Launch loses the localization at about 30 GHz:
Distance from signal via to stitching vias is about quarter of wavelength at 30 GHz – we cannot expect correlation above that frequency!
Though, the impedance of the return path remains low due to plenty of stitching vias.

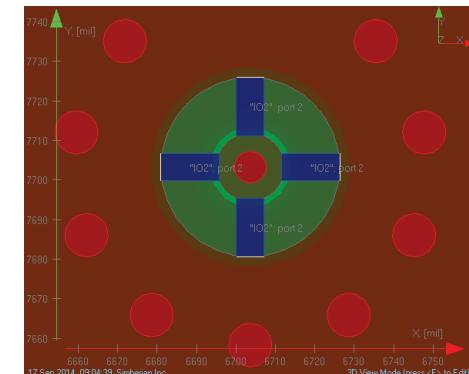

1) 2-inch microstrip line segment: Transmission phase and group delay

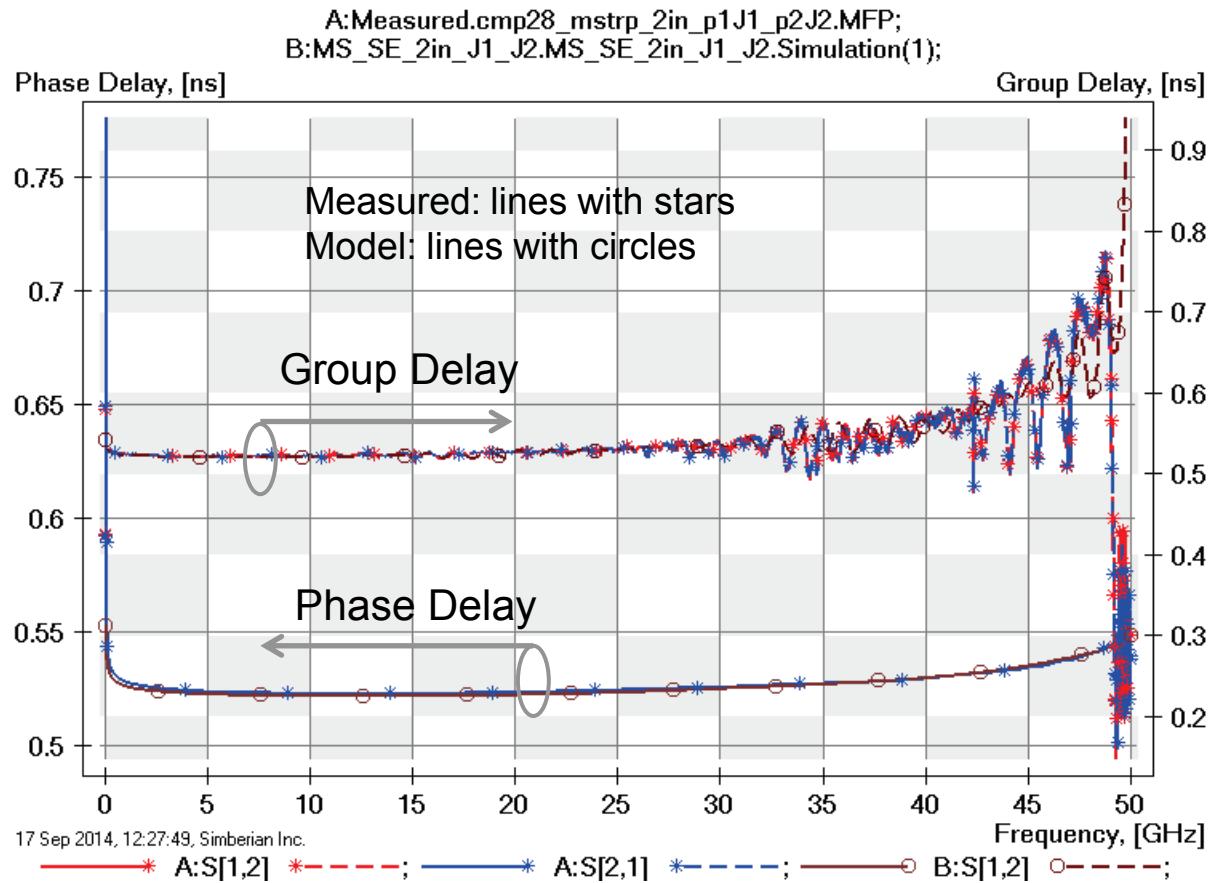


1) 2-inch microstrip line segment: TDR with 20 ps Gaussian step

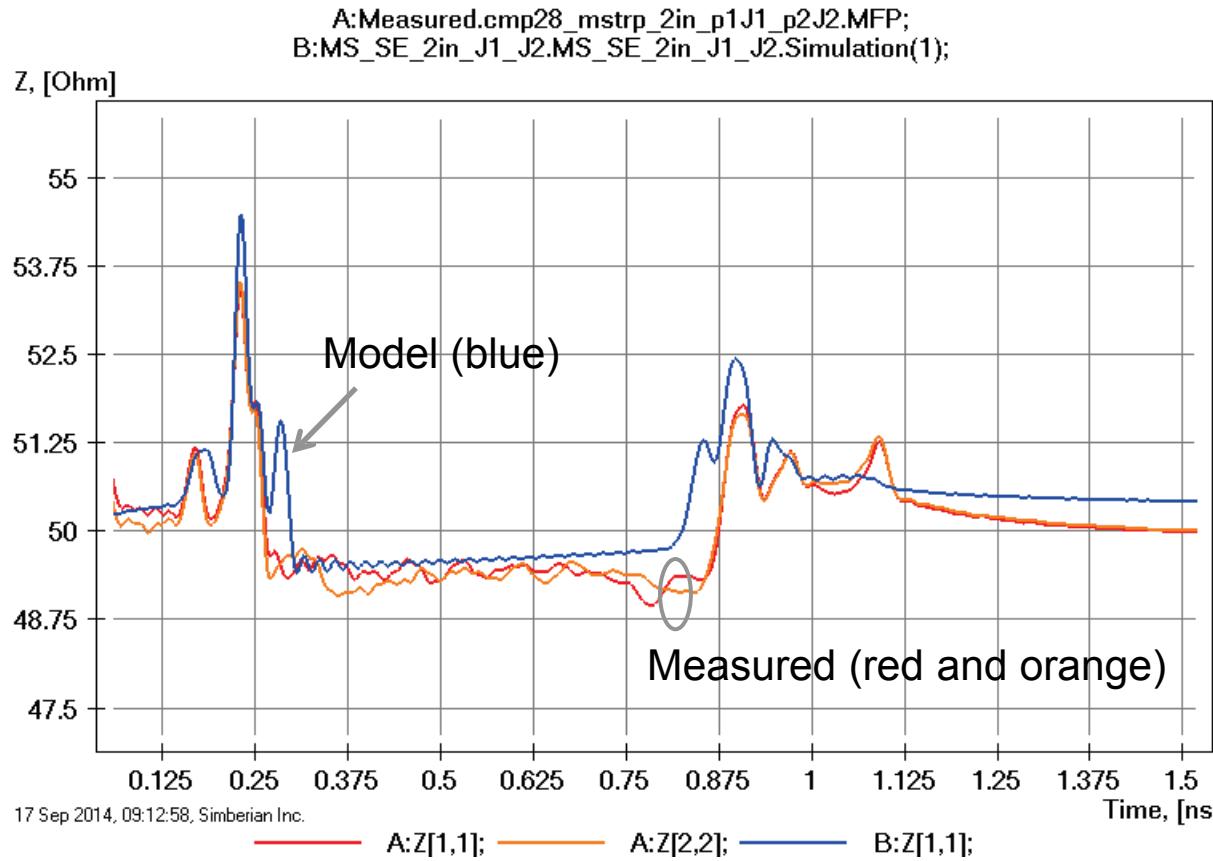






Variations of impedance along the traces visible here indicates that either trace width is varying or dielectric is inhomogeneous (or both); This is not accounted for in the model and partially explains differences in the reflection.

1) 2-inch microstrip line segment: 28 Gbps PRBS, 25 ps rise/fall time

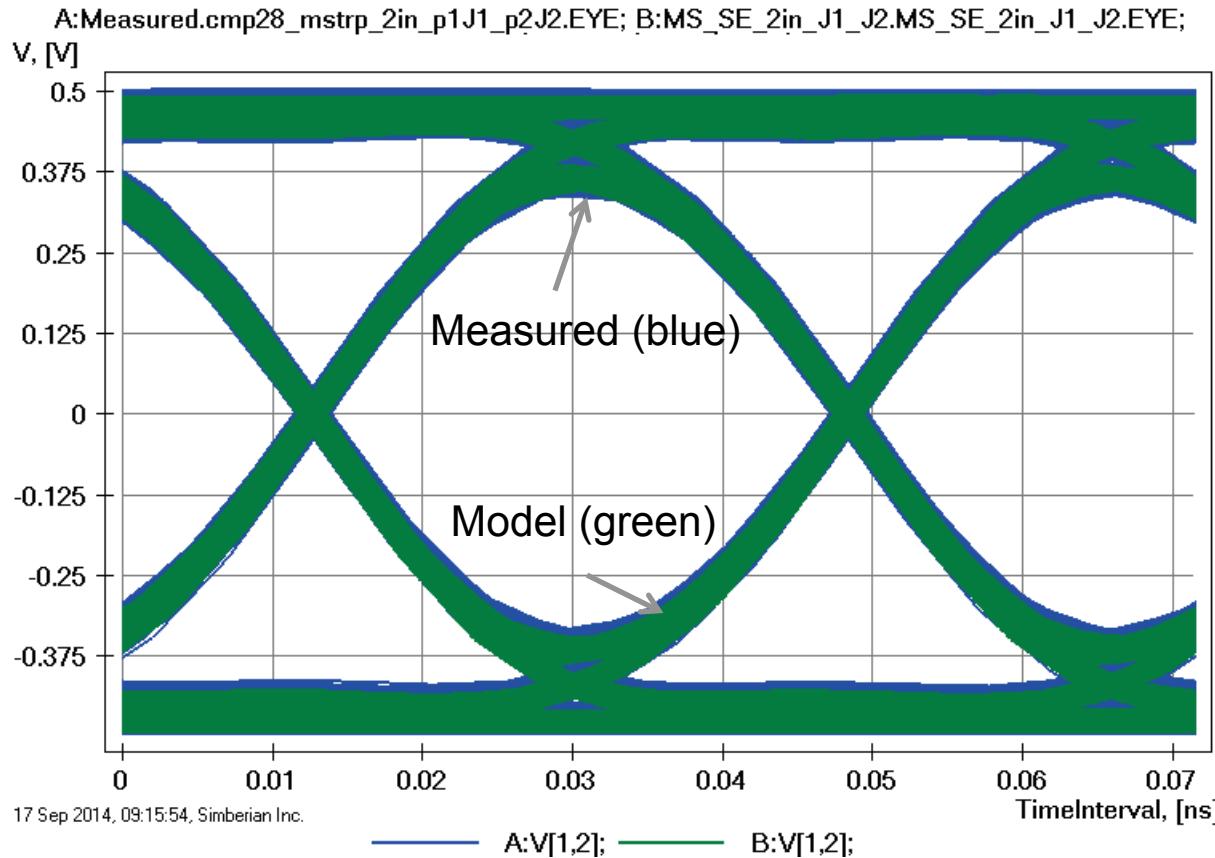


Eyes are on top of each other!





2) 8-inch microstrip line segment

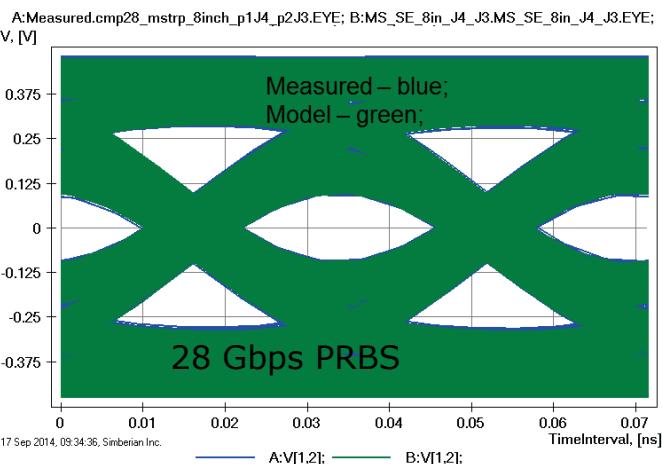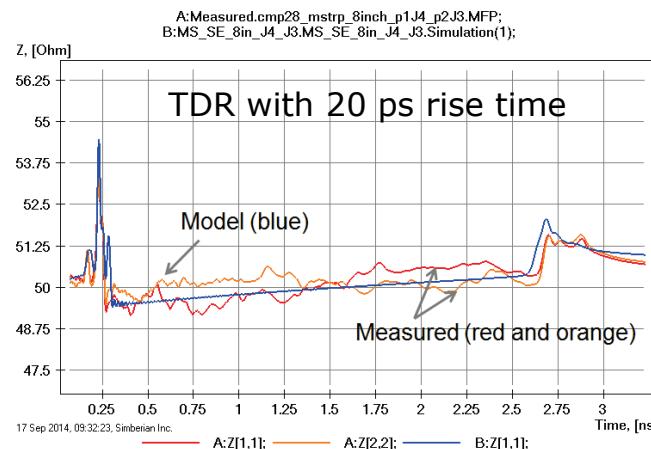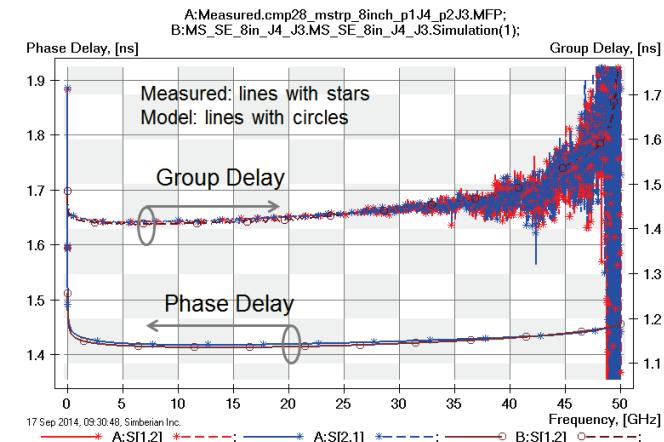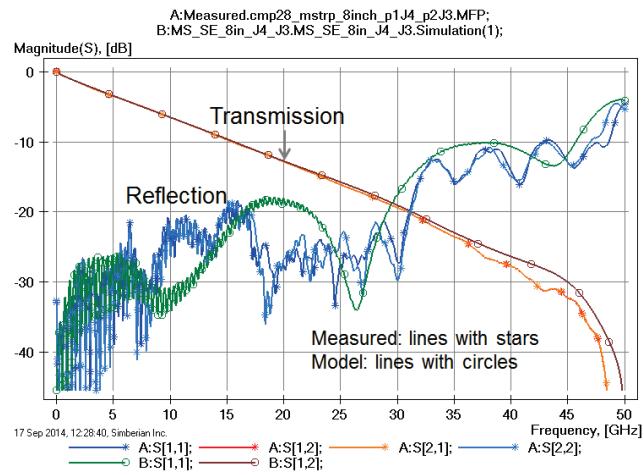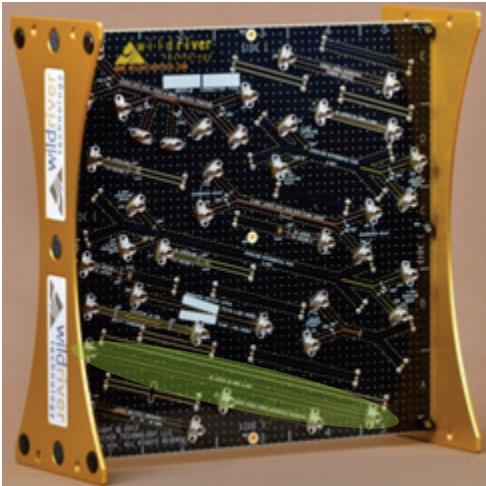


12) Microstrip line with two capacitive vias

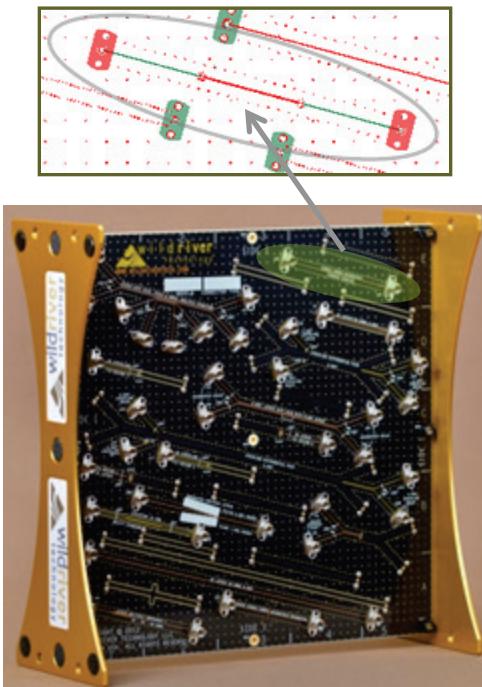





Both narrow and wider sections widths are reduced by 1mil

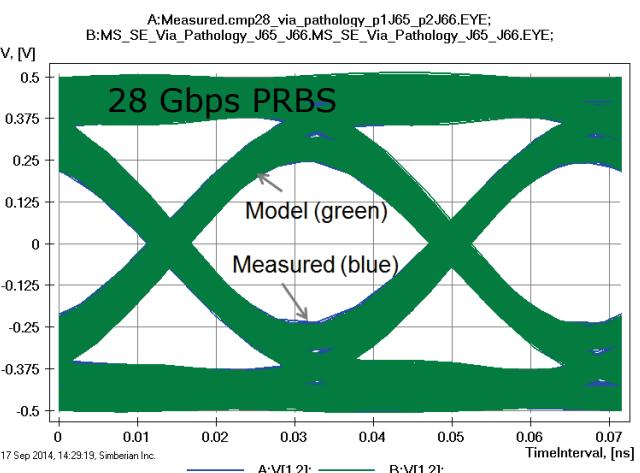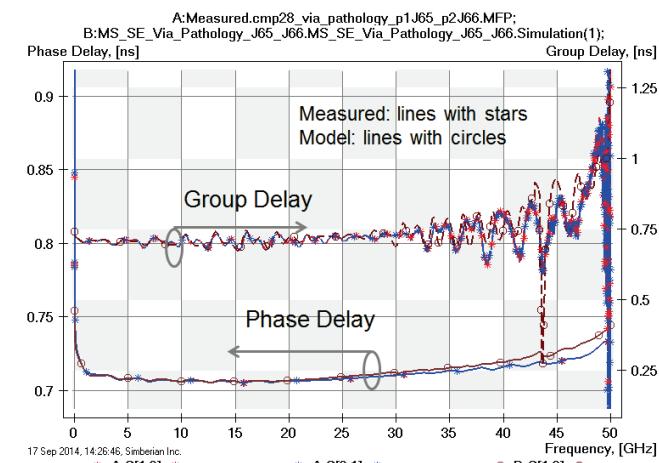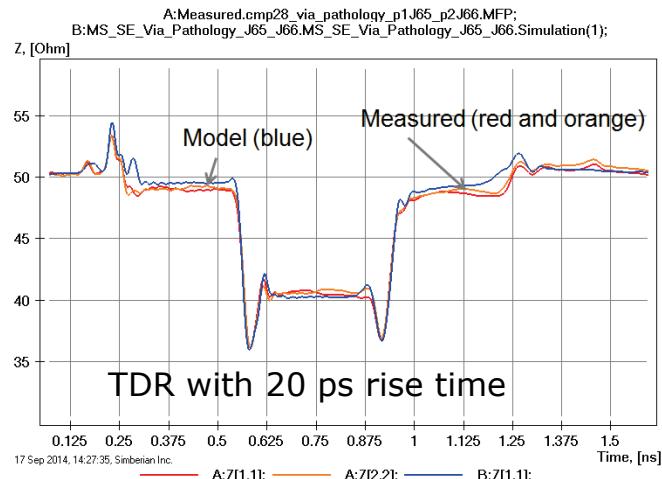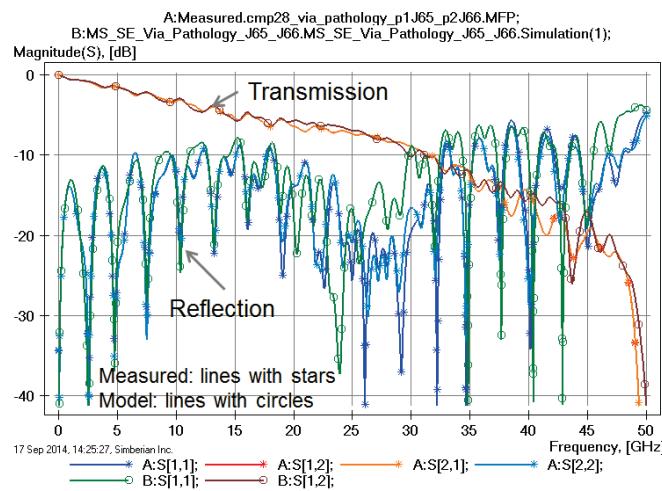


14) 6-inch microstrip differential line

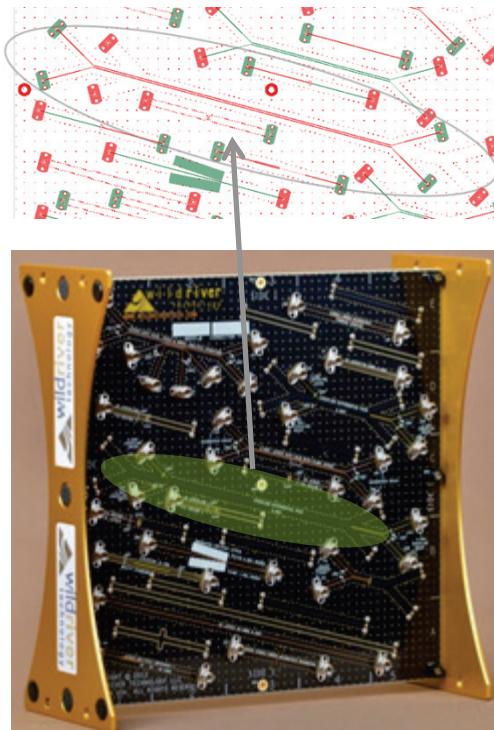

DM – Differential Mode
CM – Common Mode

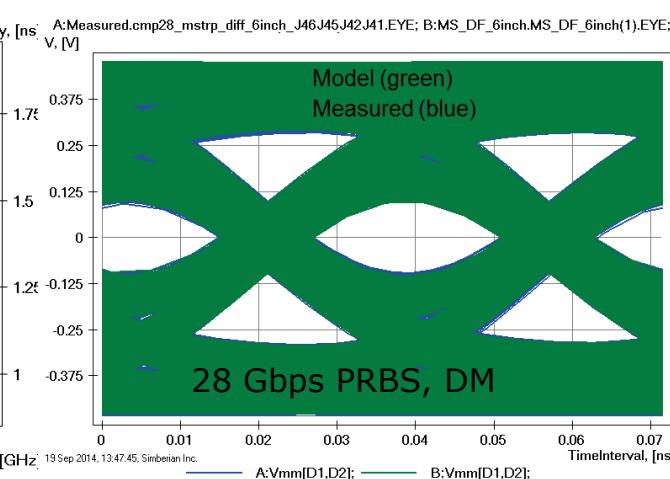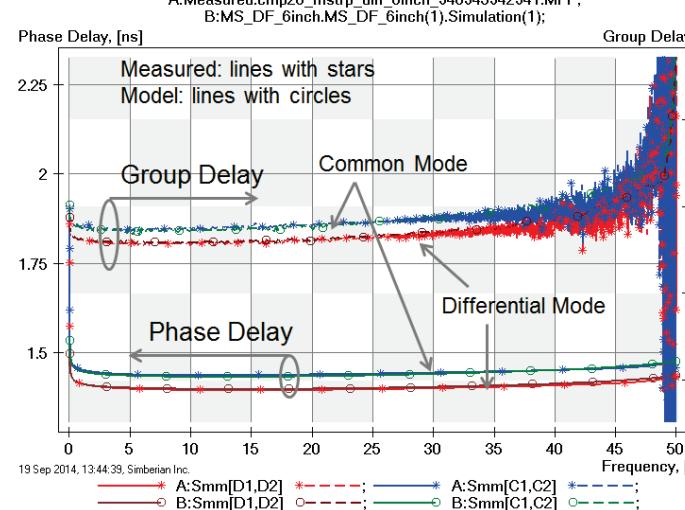
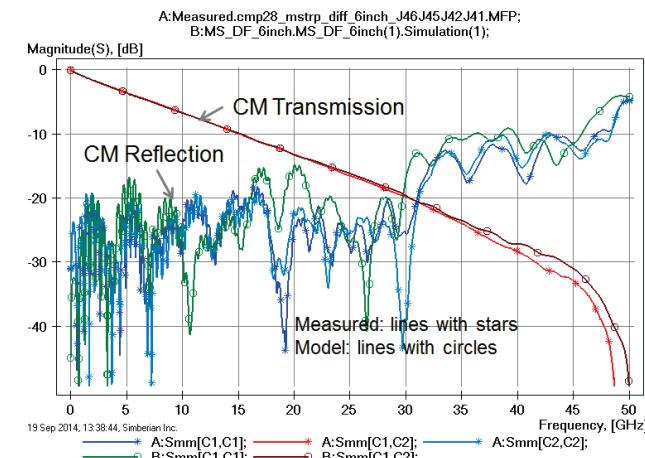
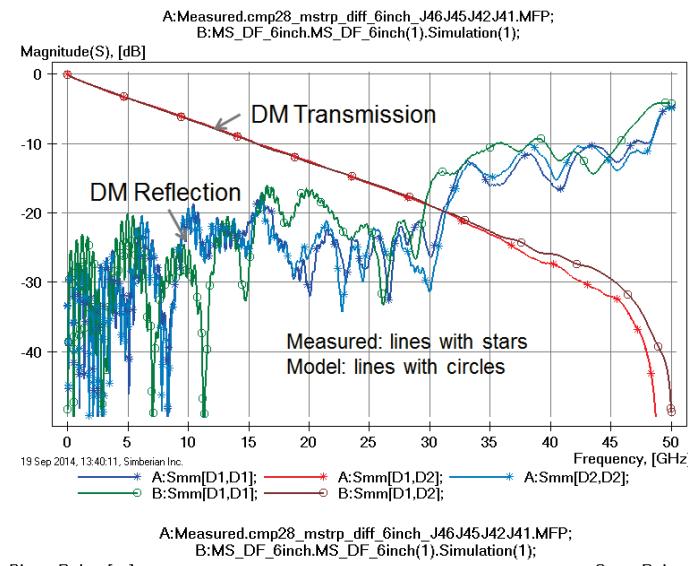


16) Microstrip differential line with vias

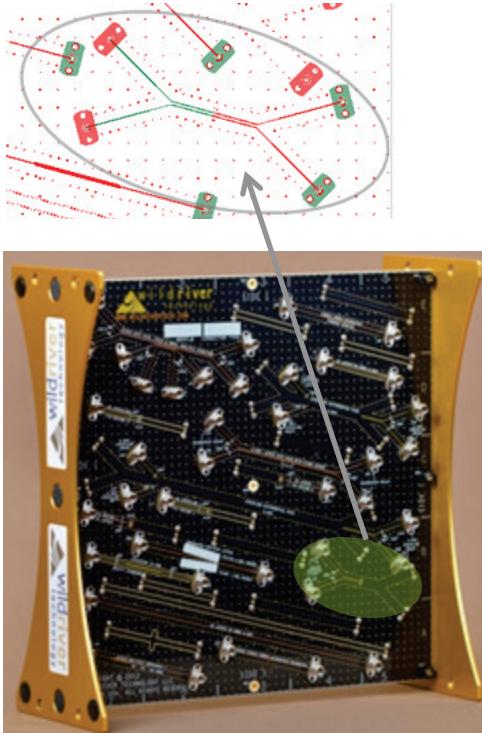


DM – Differential Mode
CM – Common Mode



Discrepancies in geometry of the transitions from SE to DF

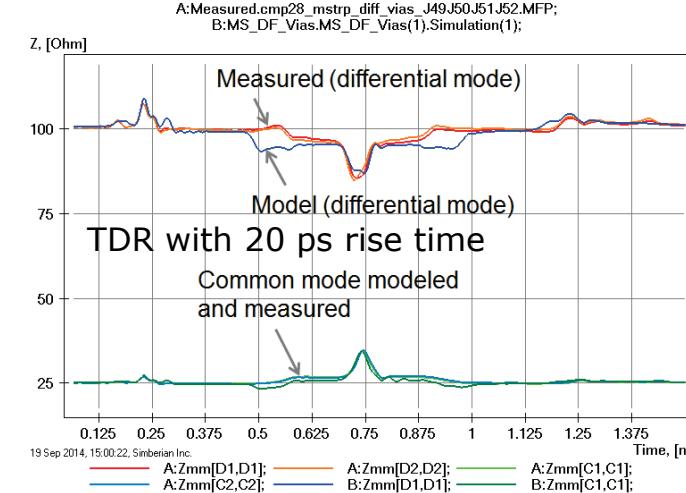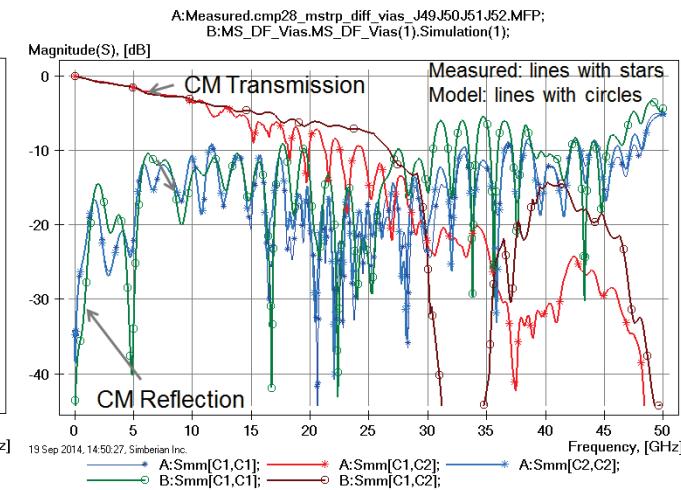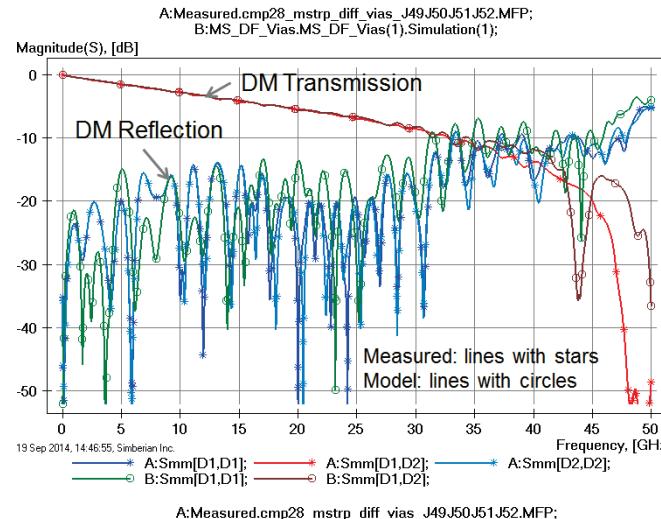





Loss of the localization for Common mode at about 15-10 GHz

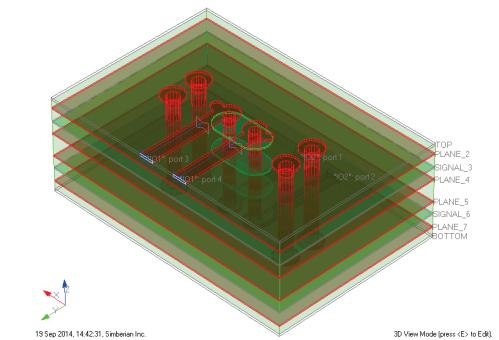


19) 8-inch single-ended strip line

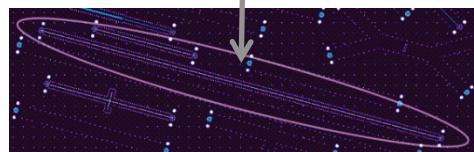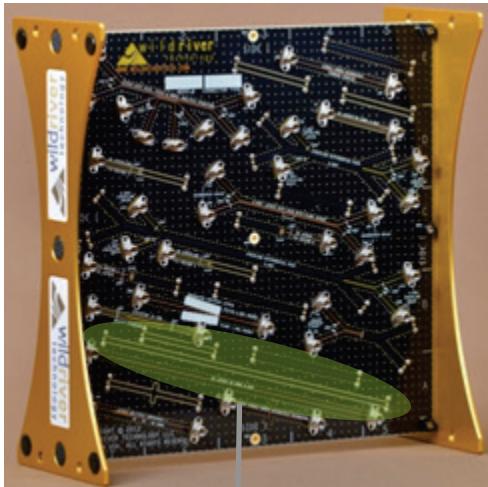



*Launch model is the worst case;
Localization problem;*

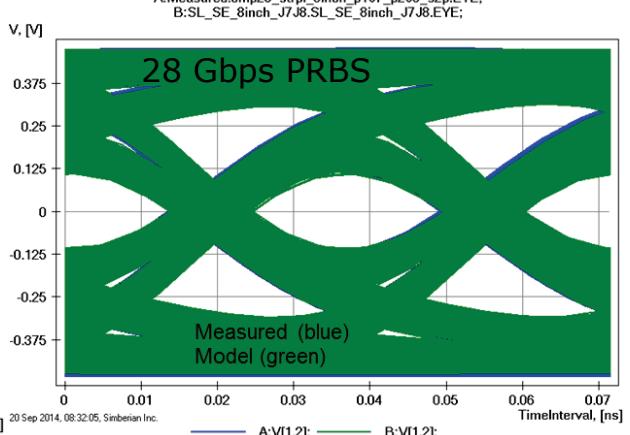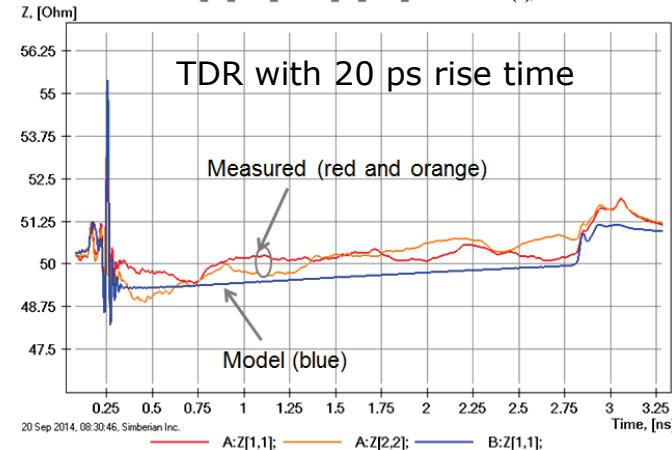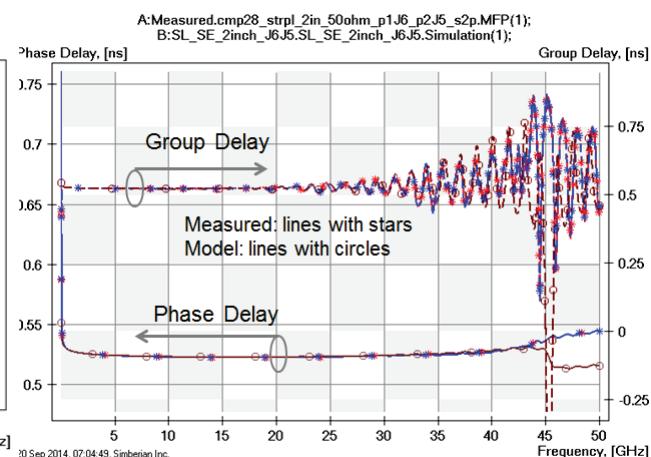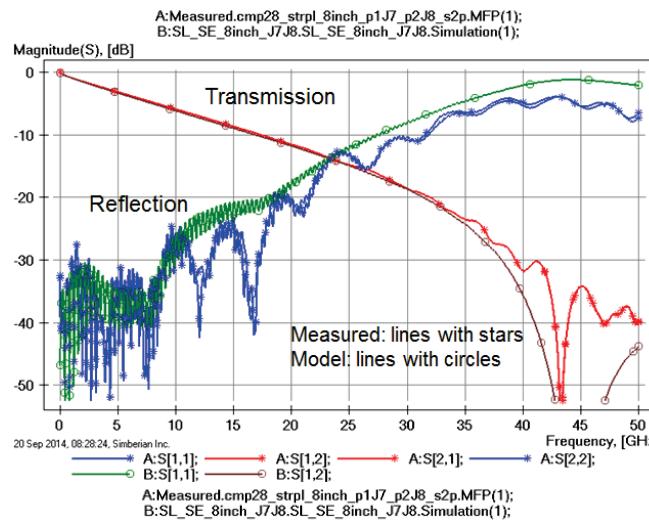

26) 6-inch strip differential line

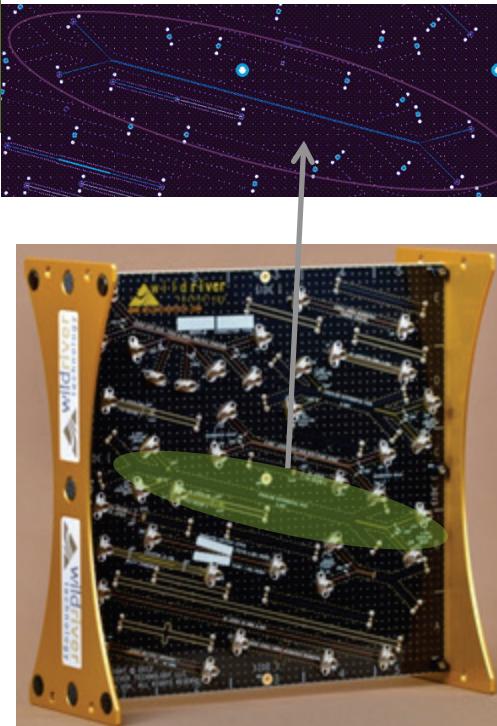

DM – Differential Mode
CM – Common Mode

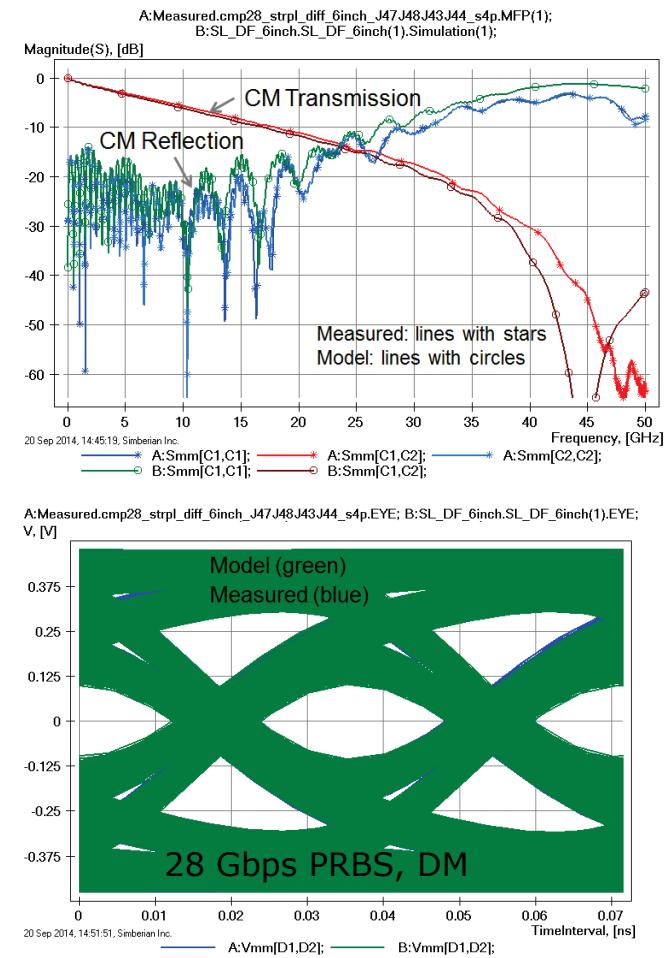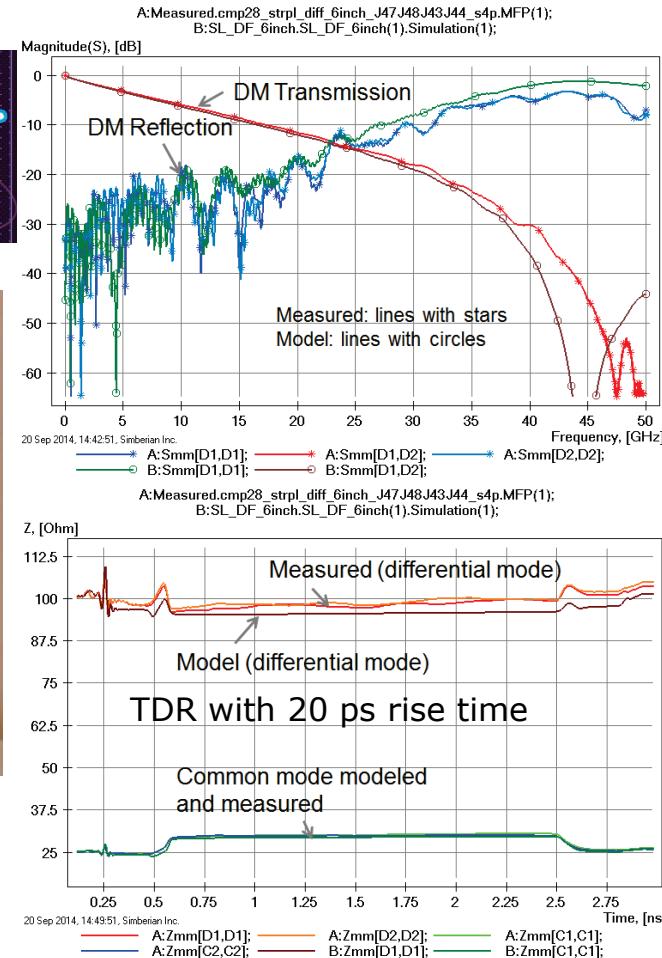

Conclusion

- Systematic process of the interconnect analysis-to-measurement validation up to 50 GHz is introduced – **such process should be standardized**
- Readily available validation platforms represent a critical SI tool for the manufacturing, measurement and software benchmarking
- The process is illustrated with CMP-28 validation platform and Simbeor electromagnetic signal integrity software
- Following the process one can qualify or reveal problems in any signal integrity software and compare accuracy, productivity and cost...
- Contacts and further resources:
 - Simberian web site and contacts: www.simberian.com
 - Wild River Technology web site and contacts: <http://wildrivertech.com>